


LED PÁS CV ERALED - SÉRIA HIGH LUMEN


LED pás konštantného napätia SMD2835




ILUMINAČNÝ DIAGRAM

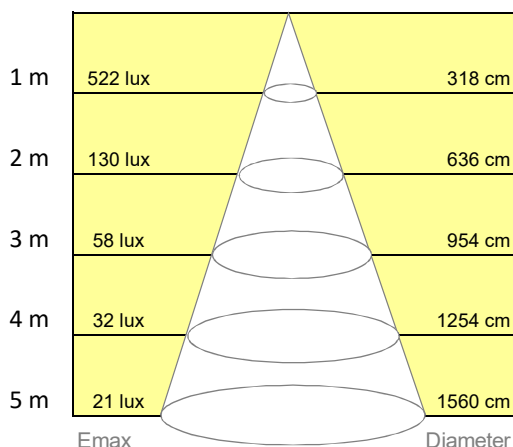

Verzia 12VDC:

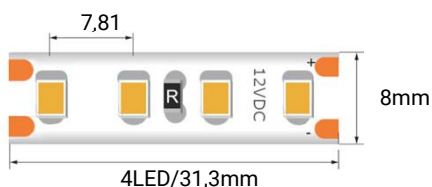

Verzia 24VDC:

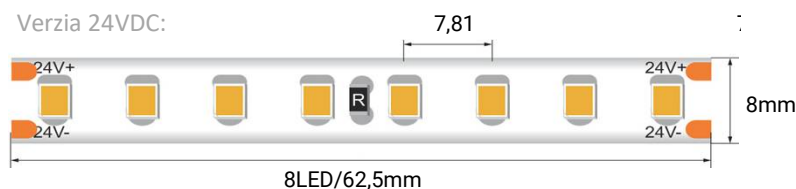

Model

ERA2835-WW128-12-5Y

ERA2835-NW128-12-5Y

ERA2835-PW128-12-5Y

3000K

4000K

6500K

ELEKTRO PARAMETER	12VDC - vol. 24VDC
	10W/m

FARBA CCT	3000K teplá biela CRI90
	4000K neutral biela CRI90
	6500K studená biela CRI90

LED INFO	SMD2835 3 Step 1Bin
	128LED/m

SVETELNÝ TOK	3000K	1550lm/m
	4000K	1620lm/m
	6500K	1650lm/m

TEPLOTA	Pracovná - 20° ~ + 45°C
	Max < 65°C

STMIEVANIE	PWM, RF
	DALI, DMX, 0-10V

VYŽAROVACÍ UHOL	120°
-----------------	------

KRYTIE	IP20
	IP54, IP65, IP67

ROZMERY	Šírka	8 mm
	Hrúbka	1,1 mm
	Delenie	31,3 mm
	Balenie	5 m

OSTATNÉ	CE, RoHS, UL, FCC, EN-D
	Záruka 5 rokov

Všetky pripájacie body sú cínované!

