

LED PÁS CC ERALED - SÉRIA PROFI

LED pás konštantného prúdu SMD2835



Model

ERA2835-WW120-24-CC

ERA2835-NW120-24-CC

ERA2835-PW120-24-CC


3000K

4000K

6500K



PHOTOMETRICS

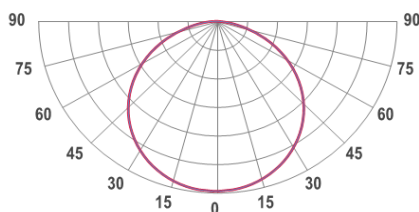

ILUMINAČNÝ DIAGRAM

| | | |
|-----|---------|---------|
| 1 m | 396 lux | 330 cm |
| 2 m | 99 lux | 660 cm |
| 3 m | 44 lux | 980 cm |
| 4 m | 25 lux | 1320 cm |
| 5 m | 16 lux | 1600 cm |

Emax Diameter



ELEKTRO PARAMETER

24VDC - IC je súčasťou LED čipu
10W/m

FARBA CCT

3000K neutral biela CRI85/95

4000K teplá biela CRI85/95

6500K studená biela CRI85/95

LED INFO

SMD2835 Epistar
120LED/m

SVETELNÝ TOK

3000K 1150lm/m

4000K 1200lm/m

6500K 1210lm/m

TEPLOTA

Pracovná - 20° ~ + 50°C

Max 60°C

STMIEVANIE

PWM, RF, 0-10V, DALI, DMX

VYŽAROVACÍ UHOL

120°

KRYTIE

IP20

Voliteľné IP65/IP67

ROZMERY

Šírka 10mm

Hrúbka 1,1mm

Delenie 6LED/50mm

Balenie 20m

ENERGETICKÁ TRIEDA

E

