

# SLIM 1024



Wall mounted USB to DMX Stand Alone Interface



**FREE SOFTWARE & APPLICATION DOWNLOAD**

The SLIM Stand Alone interface provides a wall-mounted solution designed for indoor installations and projects requiring a user-friendly and aesthetically-pleasing lighting control panel.

Easily mounted on any surface, the control panel fits standard European and US wall plugs.

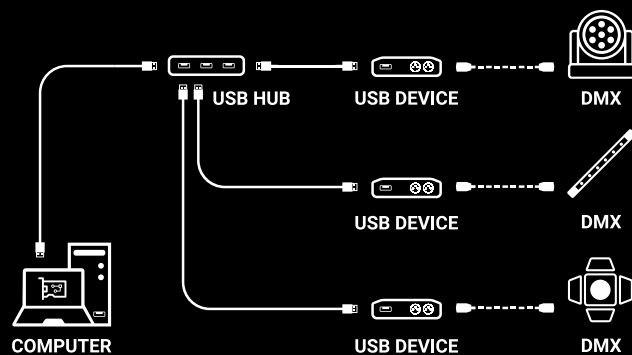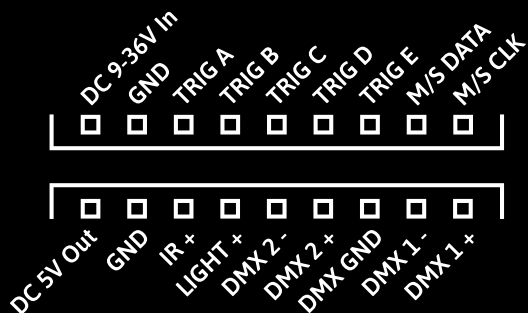

## HARDWARE Features

DMX Output	1024 In/Out channels PC and Stand Alone
Multiple Zone	5 Zones, play up to 5 different scenes/sequences at time in Stand Alone
Memory	Micro SD Card (all FAT format, up to 256 GB) + Internal memory (No SD card required)
DMX Modes	DMX In/Out, DMX Splitter, DMX Merge, DMX Record, DMX Trigger
Stand Alone Options	6 selectable modes: Buttons (8), Pages (10), Zones (5), Colour (99 RGB + 8 RGBW), Commands from the Contacts (speed, scene, dimmer, zone)
	Time Clock setting adjustable in Stand Alone.
	16-bit and fine channel management
	Automatic Scene Recovery if the power is cut off
	Cross Fade time between scenes
	Turn Off display after 4s., Default start scene, Dimmer and RGB color selection
	Master/Slave mode with Up to 32 devices combined and synchronized (64 universes)
Triggers (Stand Alone)	8 buttons with blue status LED, 10 Pages
	Real Time Clock and calendar for each scene (Hour, Day, Week, Month, Year)
	5 Dry Contacts on 3-5V (On, On/Off, Release, Restart, Scene Priority, 31 contacts max)
	DMX input (DMX signal from another DMX device)
	Infrared Remote, Light intensity (with optional deported PCB and remote)
Max DMX outputs (USB)	x12 USB interfaces connected = 24 DMX max
Power	5V DC (USB), 5V to 24V - 0.2A (screw connector), 0.2W, High Voltage Protection
Dimension	H: 1.9 cm ; W: 12.7 cm ; L: 11 cm ; 0.2 Kgs (WALL-MOUNTED)
Housing	Black or White ABS Plastic with mounting slots
I/O Connectors	Mini USB 2.0, Screw Terminal block 2x9 Pins
Operating Temperature	-40 to +85 C°
IP Rating	IP40
Certifications	CE, LVD, RoHS
International Warranty	5 years



## SOFTWARE Features

PRO DMX 2	Yes
LED Player	Up to 64x512 DMX Outputs
Pro DMX	30 minutes Audio and Video Timeline
Studio DMX	3D viewer in real time, Full mode
Wi-Light 2 APP	Mobile software control (Android, iOS)
Art-Net Output from PC	2x512 DMX Outputs per connected device
System Compatibility	Windows, iOS, Linux
Technical support	Worldwide, English, French, Chinese

### Mobile minimum configuration:

Android 5 / iOS 10 and +  
1Ghz CPU, 1 Gb RAM, 60 Mb disk

### Configuration minimale PC:

Windows, Mac OS, Linux (32 and 64 bits)  
2Ghz CPU (2 cores), 8 Gb RAM  
2Gb RAM graphic card (for 3D only)  
600 Mb disk, 1920x1080 resolution  
1 USB port (Device)  
1 Ethernet Port (for Art-Net & sACN)

