



LED PÁS CC ERALED - séria ULTRA EFEKTÍVNE



LED pás extra výkonný s nízkym príkonom.

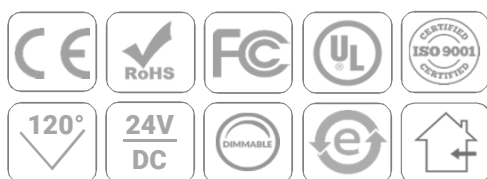

PHOTOMETRICS

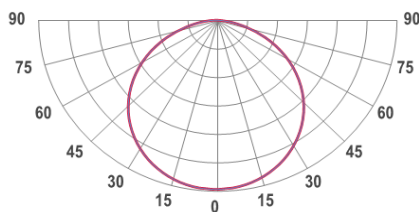

ILUMINAČNÝ DIAGRAM

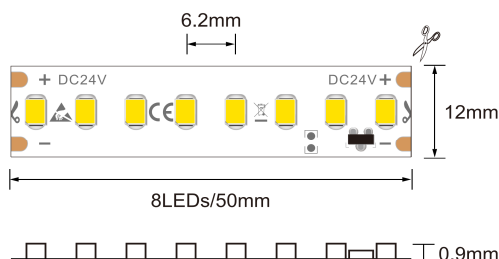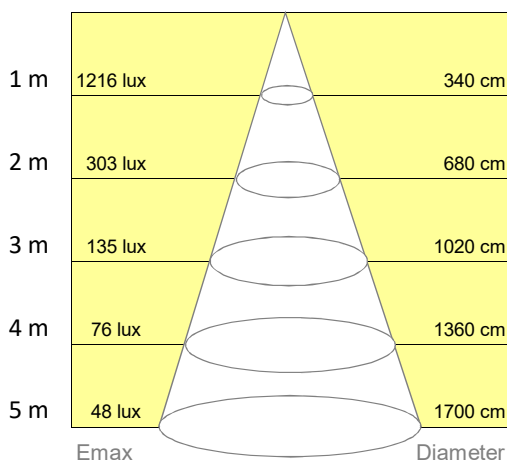

Model

ERA2835-DL160-WW-UE

ERA2835-DL160-NW-UE

ERA2835-DL160-PW-UE

3000K

4000K

6500K

ELEKTRO PARAMETER

24VDC - 20W/m

3 SDCM 1 Bin 3oz, teplotné čidlo

FARBA CCT

3000K teplá biela CRI85 vol 90/95

4000K neutral biela CRI85 vol 90/95

6500K studená biela CRI85 vol 90/95

LED INFO

SMD2835 Epistar

160LED/m

SVETELNÝ TOK

3000K 3570lm

4000K 3730lm

6500K 3725lm

TEPLOTA

Pracovná - 20° ~ + 45°C

Max < 75°C

STMIEVANIE

Áno

PWM, RF, 0-10V, DALI, DMX

VÝŽAROVACÍ UHOL

120°

KRYTIE

IP20

Voliteľné IP54/IP65/IP66/IP67/IP68

ROZMERY

Šírka 12 mm

Hrúbka 0,9 mm

Delenie 50 mm

Balenie 5 m

